




90.US0935-A

EverGlow Extruded Aluminum

2-pc Stair Nosing for New Construction

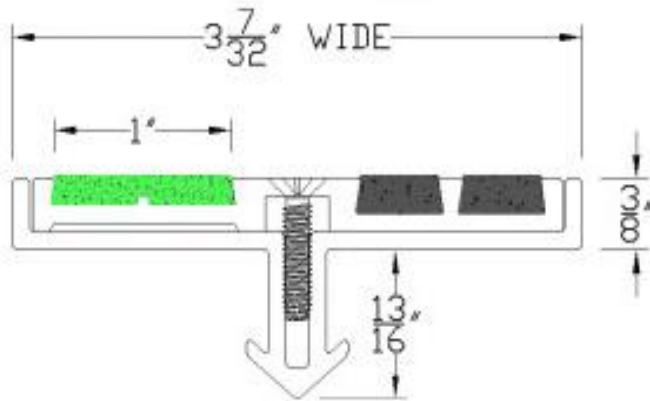

The **90.US0935-A** 2-Piece Stair Nosing for New Construction is similar to the original 90.US0935 Stair Nosing. The square front and back edges of this nosing are designed to allow the nosing to be more easily installed **set back away** from the leading edge of the stair tread or landing.

3 7/32" wide, 3/8" thick
DRAWING NOT TO SCALE

These high quality photoluminescent and slip resistant stair nosings provide an exit path marking and safety egress system that meets all building & fire codes in the US & Canada. These stair nosings also meet the requirements of NFPA 101, The Life Safety Code. The use of heat treated and corrosion resistant aluminum assures superior resistance to wear under heavy pedestrian use. EverGlow surfaces are easy to clean and maintain.

90.US0935-A 2-Pc Stair Nosing for New Construction Features:

- Replaceable aluminum insert with slip resistant and photoluminescent surfaces.
- Designed to be installed set back from the leading edge of the stair tread or landing.
- Mill Finish extruded aluminum base & insert, type 6063-T6.
- Approximately 3 1/8 inches wide, front to back.
- Maximum Length - 8 feet.
- Front 1" edge glows-in-the-dark.
- Color extended throughout filler.
- Excellent wear resistant and slip resistant characteristics.
- Available (by request) with wooden insert in the base for use during construction.
- Delivered cut to size, with predrilled & countersunk holes and flat head fasteners.

90.US0935-A 2-Pc Stair Nosing for New Construction Specifications:

- 90.US0935-A 2-Pc Stair Nosing for New Construction are for use in new construction, for interior and exterior installations.
- The photoluminescent strip in the front is to be filled with a fully cured resilient type epoxy filler for improved ability to keep clean.
- Rigid aluminum anchor is designed to be easily installed in freshly poured concrete in steel pan stairs.

- Nosings shall terminate not more than 4" from ends of steps for poured concrete stairs.
- Complies with all requirements of NY City local law 26 (2004) RS 6-1, viz. flammability (ASTM D635-2003), toxicity (SMP 800C), washability (ASTM 4828-1994), radioactivity (ASTM D3684-2004) and brightness (ISO 17398-2004)
- Complies with International Building & Fire (model) Codes and all current local codes across the US.
- Meets all requirements of NFPA 101 (The Life Safety Code).
- Not combustible, free of hazardous and radioactive substances.
- When used, the wooden insert shall be replaced with the aluminum insert designed for this nosing.

ORDER STAIR NOSINGS FOR NEW CONSTRUCTION WELL IN ADVANCE OF EXPECTED INSTALLATION DATE AND BEFORE THE CONCRETE POUR FOR THE STAIRS WHERE THESE NOSINGS WILL BE USED. THIS IS A LONG LEAD TIME PRODUCT.



Base & Wood
(for use during construction)

Wood Replaced by Aluminum Insert
(after construction is complete)